



TELEFUNKEN

Semiconductors

TF2110/2113

High-Side and Low-Side Gate Drivers


Features

- Drives two N-channel MOSFETs or IGBTs in high-side / low side configuration
- The floating high-side operates to 600V
- 2.5A sink / 2.5A source typical output currents
- Outputs tolerant to negative transients
- Wide gate driver supply voltage range: 10V to 20V
- Wide logic input supply voltage range: 3.3V to 20V
- Wide logic supply offset voltage range: -5V to 5V
- 15 ns(typ) rise / 13 ns (typ) fall times with 1000 pF load
- 105 ns (typ) turn-on / 94 ns (typ) turn-off delay times
- Cycle-by-cycle edge-triggered shutdown circuitry
- Extended temperature range: -40 °C to +125 °C

Applications

- DC-DC Converters
- AC-DC Inverters
- Motor Controls
- Class D Power Amplifiers

Typical Application

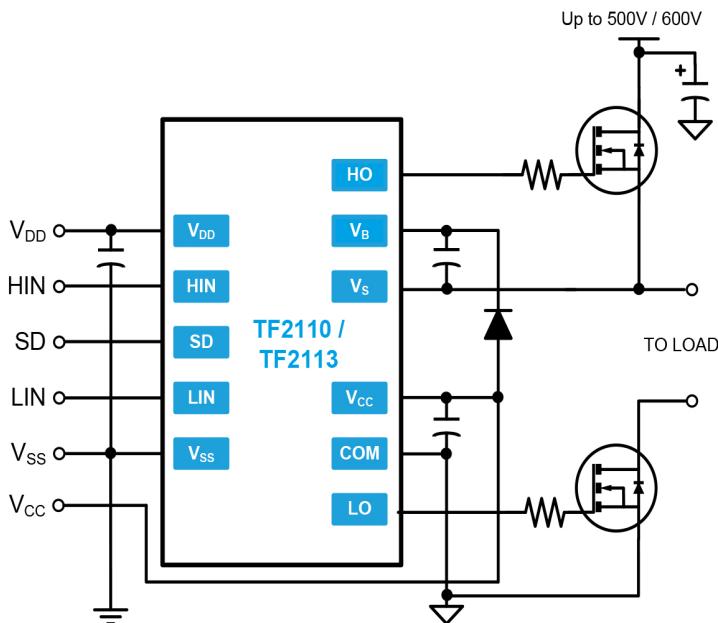

Description

The TF2110 and TF2113 are high voltage, high-speed MOSFET and IGBT drivers with independent high-side and low-side outputs. The high-side driver features floating supply for operation at up to 500V / 600V. The 10 ns (max) / 20 ns (max) propagation delay matching between the high and the low side drivers allows high frequency operation.

The TF2110 and TF2113 logic inputs are compatible with standard CMOS levels (as low as 3.3V) while driver outputs feature high pulse current buffers designed for minimum driver cross-conduction.


The TF2110 and TF2113 are offered in 16-pin SOIC wide and 14-pin PDIP packages. They operate over an extended -40 °C to +125 °C temperature range.



Ordering Information


PART NUMBER	PACKAGE	PACK / Qty	MARK	Year	Year	Week	Week
TF2110-3BS	PDIP-14	Tube / 25	YYWW				
TF2110-TEU	SOIC-16W	Tube / 45	TF	YYWW	TF2110	Lot ID	
TF2110-TEH	SOIC-16W	T & R / 1500					
TF2113-3BS	PDIP-14	Tube / 25	YYWW				
TF2113-TEU	SOIC-16W	Tube / 45	TF	YYWW	TF2113	Lot ID	
TF2113-TEH	SOIC-16W	T & R / 1500					

Pin Diagrams

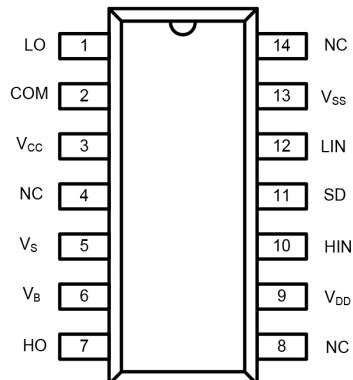

Top View: PDIP-14

TF2110/TF2113

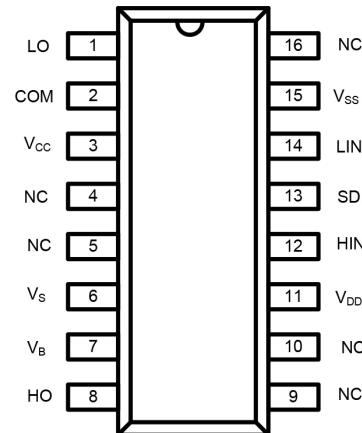

Top View: SOIC-16 Wide

TF2110/TF21138

Pin Descriptions

PIN NAME	PIN DESCRIPTION
V _{DD}	Logic power supply pin
HIN	Logic input pin for the high-side gate driver output. HIN and HO are in phase
SD	Logic input shutdown pin
LIN	Logic input pin for the low side gate driver output. LIN and LO are in phase
V _{ss}	Logic ground pin
V _B	High-side gate driver floating power supply pin
HO	High-side gate driver output pin
V _s	High-side gate driver floating power supply return pin
V _{cc}	Low-side gate driver power supply pin
LO	Low-side gate driver output pin
COM	Low-side gate driver power supply return pin
NC	"No connect" pin

Absolute Maximum Ratings (NOTE1)

V_B - High side floating supply voltage (TF2110).....	-0.3V to +524V
V_B - High side floating supply voltage (TF2113).....	-0.3V to +624V
V_S - High side floating supply offset voltage.....	V_B -24V to V_B +0.3V
V_{HO} - High side floating output voltage.....	V_S -0.3V to V_B +0.3V
dV_S/dt - Offset supply voltage transient.....	50 V/ns
V_{CC} - Low side fixed supply voltage.....	-0.3V to +24V
V_{LO} - Low side output voltage.....	-0.3V to V_{CC} +0.3V
V_{DD} - Logic supply voltage.....	-0.3V to V_{SS} +24V
V_{SS} - Logic supply offset voltage.....	V_{CC} -24V to V_{CC} +0.3V
V_{IN} - Logic input voltage (HIN, LIN and SD).....	V_{SS} -0.3V to V_{DD} +0.3V

SOIC-16W Thermal Resistance (NOTE2)

θ_{JC}	45 °C/W
θ_{JA}	90 °C/W

PDIP-14 Thermal Resistance (NOTE2)

θ_{JC}	35 °C/W
θ_{JA}	75 °C/W

T_J - Junction temperature..... +150 °C

T_L - Lead Temperature (soldering, 10 seconds)..... 300 °C

T_{STG} - Storage temerature -55 °C to 150 °C

NOTE2 When mounted on a standard JEDEC 2-layer FR-4 board.

P_D - Package power dissipation at $T_A \leq 25$ °C	
SOIC-16W.....	1.25W
PDIP-14.....	1.6W

NOTE1 Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter		MIN	TYP	MAX	Unit
V_B	High side floating supply absolute voltage				V_S + 20	V
V_S	High side floating supply offset voltage	TF2110			500	V
		TF2113			600	V
V_{HO}	High side floating output voltage		V_S		V_B	V
V_{CC}	Low side fixed supply voltage		10		20	V
V_{LO}	Low side output voltage		0		V_{CC}	V
V_{DD}	Logic supply voltage		V_{SS} + 3		V_{SS} + 20	V
V_{SS}	Logic supply offset voltage		-5 (NOTE 4)		5	V
V_{IN}	Logic input voltage (HIN, LIN and SD)		V_{SS}		V_{DD}	V
T_A	Ambient temperature		-40		125	°C

NOTE3 Logic operational for $V_S = -4V$ to +500V. Logic state held for $V_S = -4V$ to $-V_{BS}$

NOTE4 When $V_{DD} < 5V$, the minimum V_{SS} offset is limited to $-V_{DD}$

DC Electrical Characteristics (NOTES)

V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, T_A = 25 °C and V_{SS} =COM, unless otherwise specified.

Symbol	Parameter	Conditions	MIN	TYP	MAX	Unit
V_{IH}	Logic "1" input voltage		9.5			V
V_{IL}	Logic "0" input voltage				6.0	V
V_{OH}	High level output voltage, $V_{BIAS} - V_O$	$I_O = 0A$			1.4	V
V_{OL}	Low level output voltage, V_O	$I_O = 20mA$			0.15	V
I_{LK}	Offset supply leakage current	$V_B = V_S = 500V/600V$			50	µA
I_{BSQ}	Quiescent V_{BS} supply current	$V_{IN} = 0V$ or V_{DD}		55	230	µA
I_{CCQ}	Quiescent V_{CC} supply current	$V_{IN} = 0V$ or V_{DD}		56	340	µA
I_{DDQ}	Quiescent V_{DD} supply current	$V_{IN} = 0V$ or V_{DD}		0.6	30	µA
I_{IN+}	Logic "1" input bias current	$V_{IN} = V_{DD}$		20	40	µA
I_{IN-}	Logic "0" input bias current	$V_{IN} = 0V$			5.0	µA
V_{BSUV+}	V_{BS} supply under-voltage positive going threshold		7.5	8.6	9.7	V
V_{BSUV-}	V_{BS} supply under-voltage negative going threshold		7.0	8.2	9.4	V
V_{CCUV+}	V_{CC} supply under-voltage positive going threshold		7.4	8.5	9.6	V
V_{CCUV-}	V_{CC} supply under-voltage negative going threshold		7.0	8.2	9.4	V
I_{O+}	Output high short circuit pulsed current	$V_O = 0V, V_{IN} = V_{DD}, PW \leq 10 \mu s$	2.0	2.5		A
I_{O-}	Output low short circuit pulsed current	$V_O = 15V, V_{IN} = 0V, PW \leq 10 \mu s$	2.0	2.5		A


NOTE 5 The V_{IH} , V_{TH} and I_{IN} parameters are referenced to V_{SS} and are applicable to all three logic input pins: HIN, LIN and SD. The V_O and I_O parameters are referenced to COM and are applicable to the respective output pins: HO and LO.

AC Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, T_A = 25 °C, C_L =1000pF, and V_{SS} = COM, unless otherwise specified.

Symbol	Parameter	Conditions	MIN	TYP	MAX	Unit
t_{ON}	Turn-on propagation delay	V_s = 0V		105	160	ns
t_{OFF}	Turn-off propagation delay	V_s = 500V/600V		94	150	ns
t_{SD}	Shut down propagation delay	V_s = 500V/600V		70	160	ns
t_r	Turn-on rise time			15	35	ns
t_f	Turn-off fall time			13	25	ns
t_{DM}	Delay Matching	TF2110			10	ns
		TF2113			20	ns

Functional Block Diagram

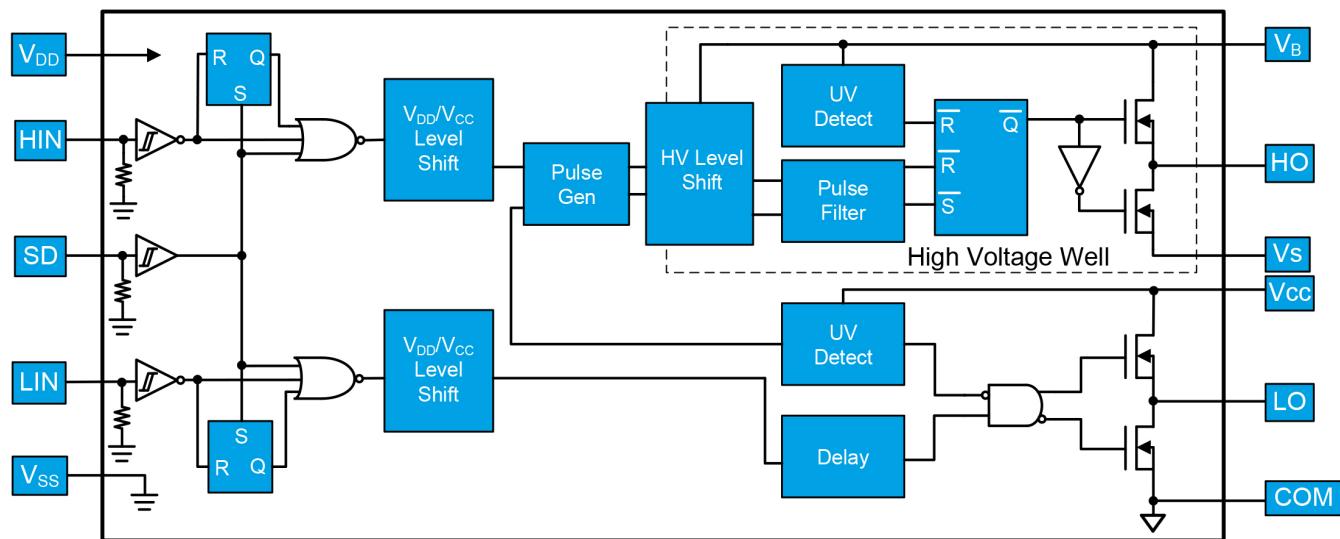

Timing Waveforms

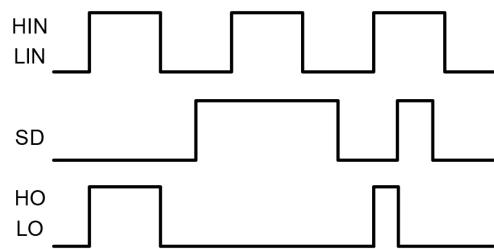


Figure 1. Input / Output Timing Diagram

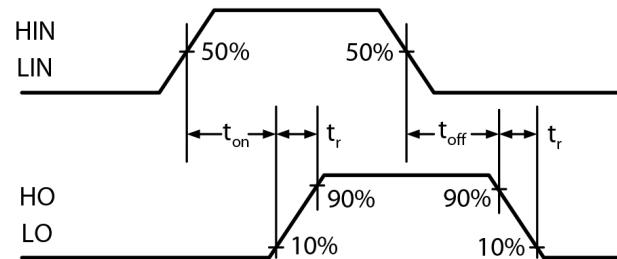


Figure 2. Switching Time Waveform Definitions

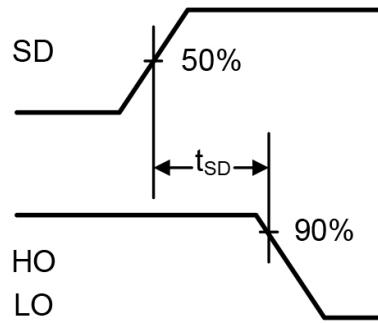


Figure 3. Shutdown Waveform Definitions

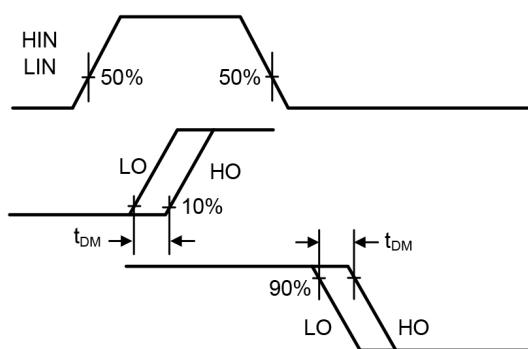


Figure 4. Delay Matching Waveform Definitions

Typical Characteristics

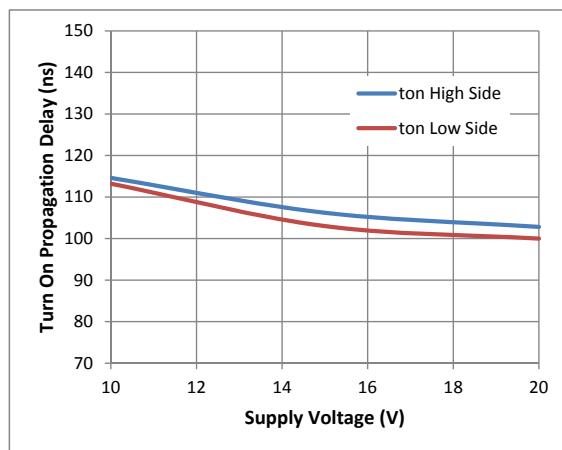


Figure 5. Turn-on Propagation Delay vs. Supply Voltage

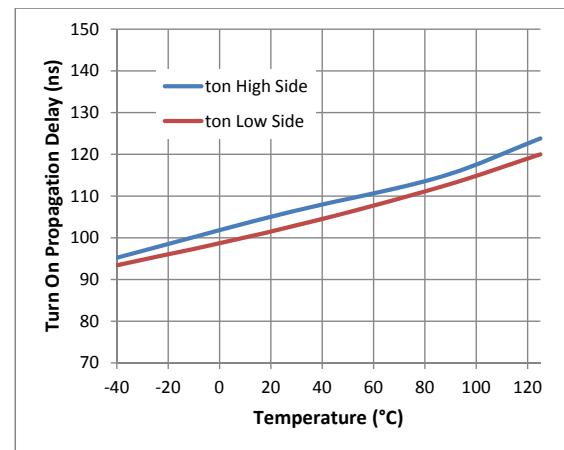


Figure 6. Turn-on Propagation Delay vs. Temperature

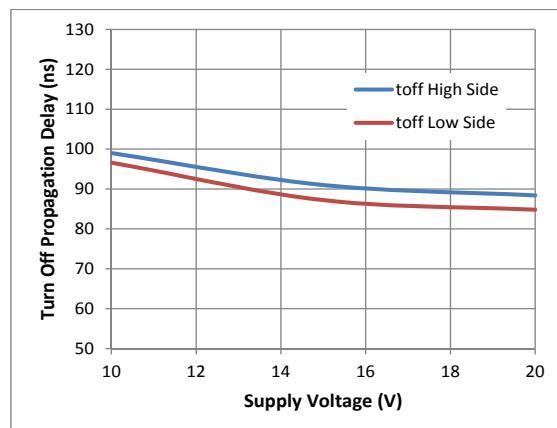


Figure 7. Turn-off Propagation Delay vs. Supply Voltage

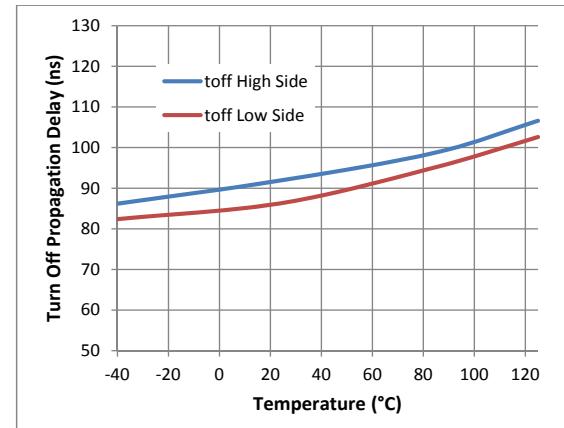


Figure 8. Turn-off Propagation Delay vs. Temperature

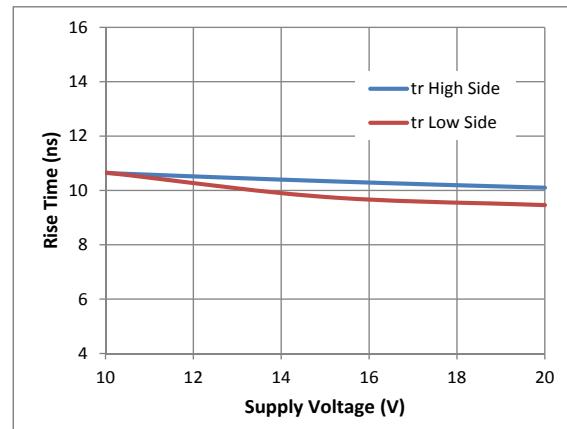


Figure 9. Rise Time vs. Supply Voltage

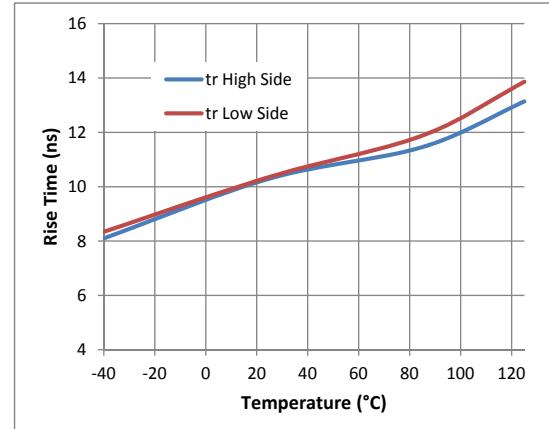


Figure 10. Rise Time vs. Temperature

Typical Characteristics, cont'd

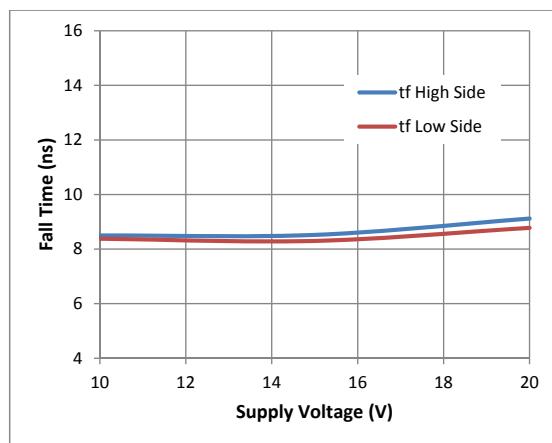


Figure 11. Fall Time vs. Supply Voltage

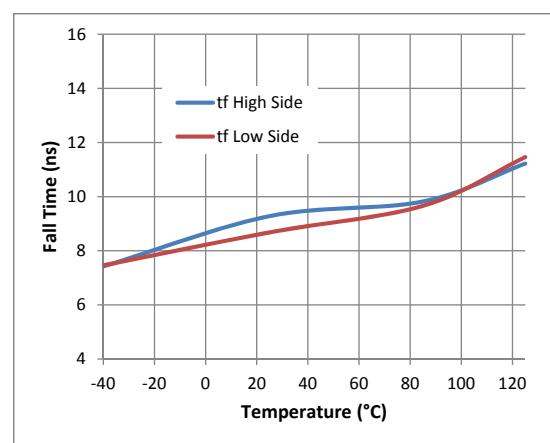


Figure 12. Fall Time vs. Temperature

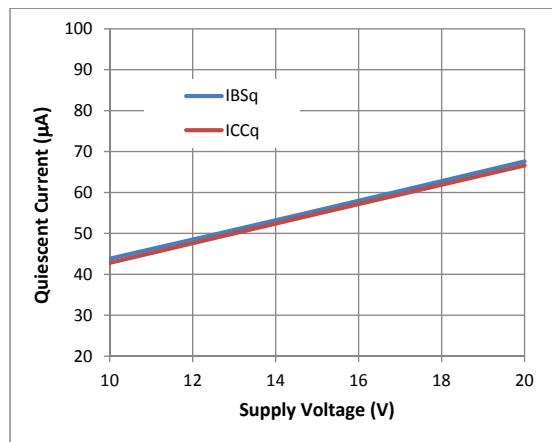


Figure 13. Quiescent Current vs. Supply Voltage

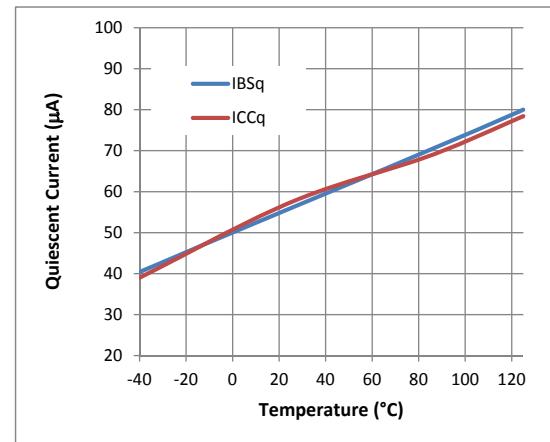


Figure 14. Quiescent Current vs. Temperature

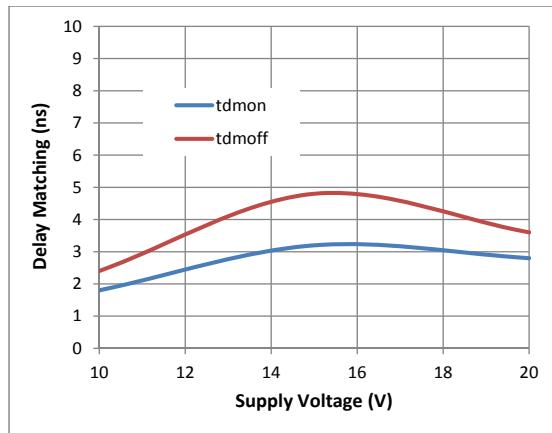


Figure 15. Delay Matching vs. Supply Voltage

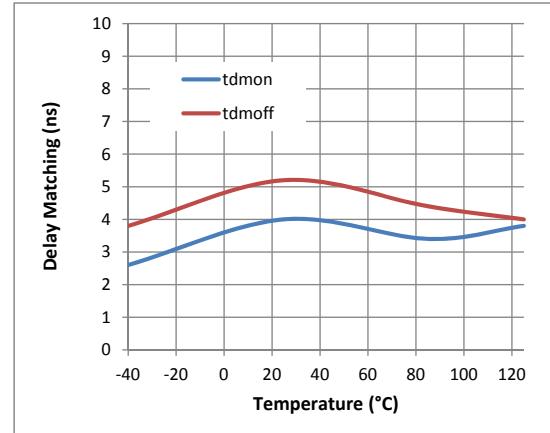


Figure 16. Delay Matching vs. Temperature

Typical Characteristics, cont'd

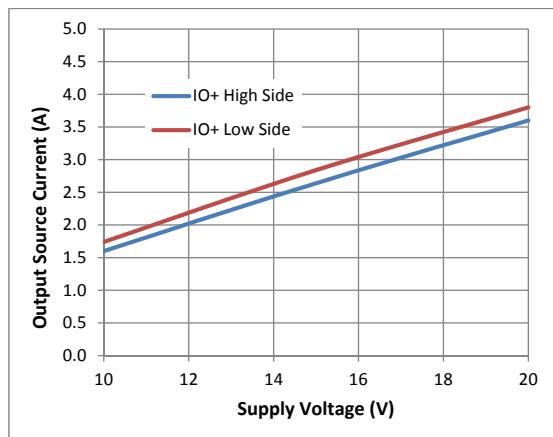


Figure 17. Output Source Current vs. Supply Voltage

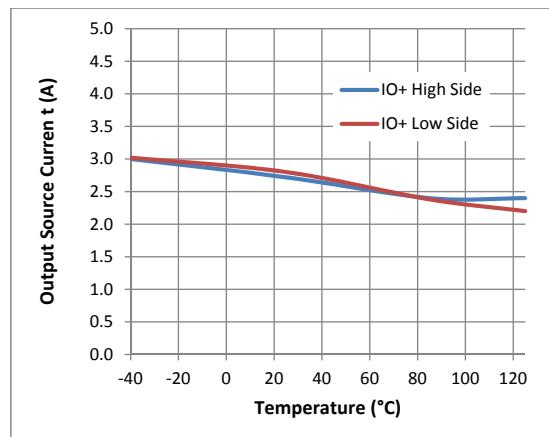


Figure 18. Output Source Current vs. Temperature

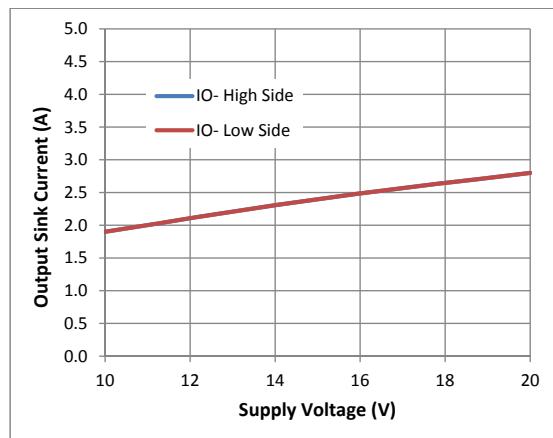


Figure 19. Output Sink Current vs. Supply Voltage

Note: graphs overlap one another

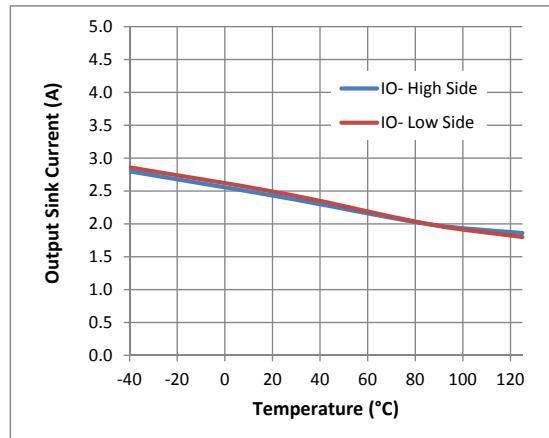


Figure 20. Output Sink Current vs. Temperature

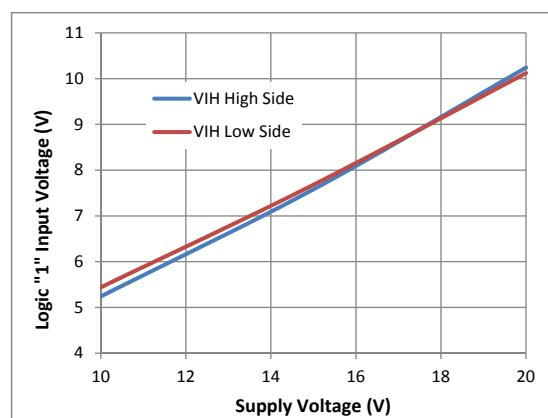


Figure 21. Logic 1 Input Voltage vs. Supply Voltage

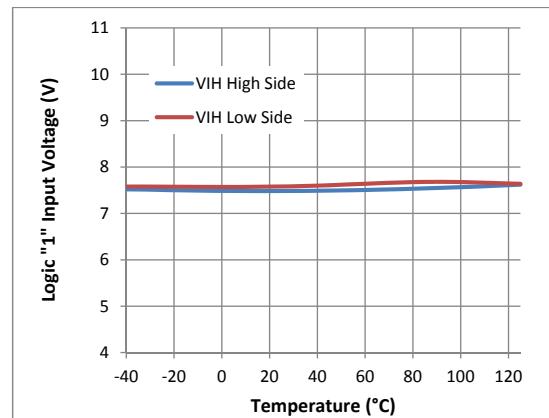


Figure 22. Logic 1 Input Voltage vs. Temperature

Typical Characteristics, cont'd

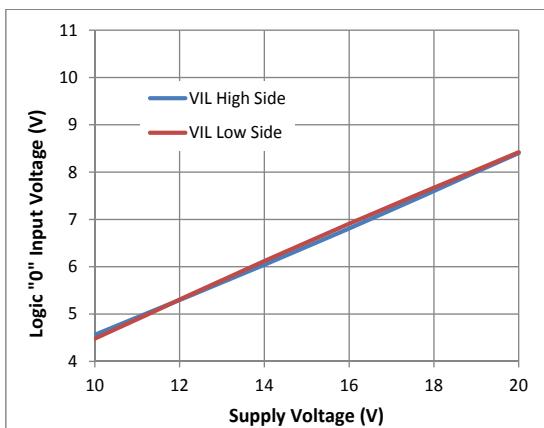


Figure 23. Logic 0 Input Voltage vs. Supply Voltage

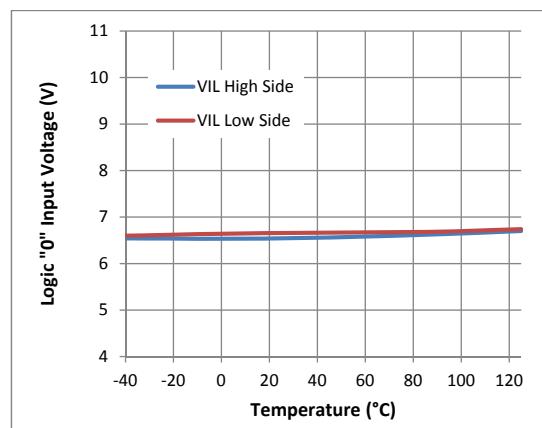


Figure 24. Logic 0 Input Voltage vs. Temperature

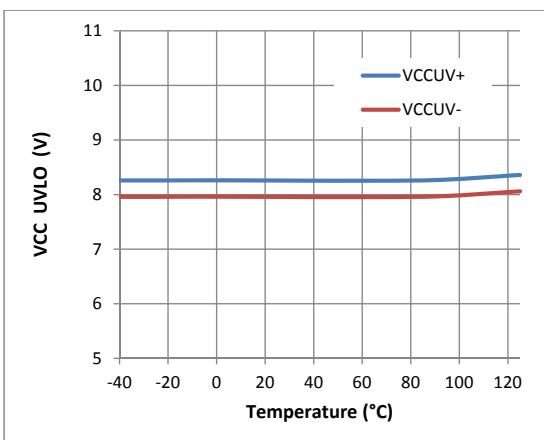


Figure 25. V_{CC} UVLO vs. Temperature

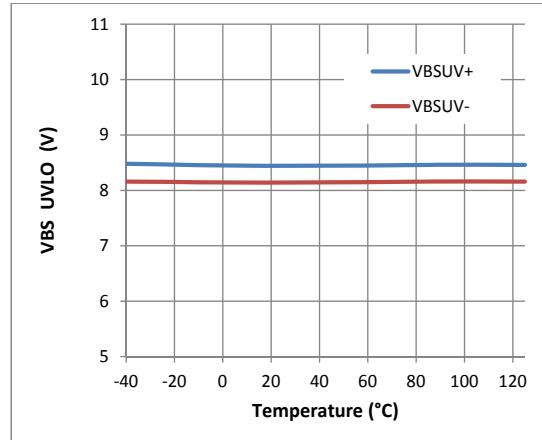


Figure 26. V_{BS} UVLO vs. Temperature

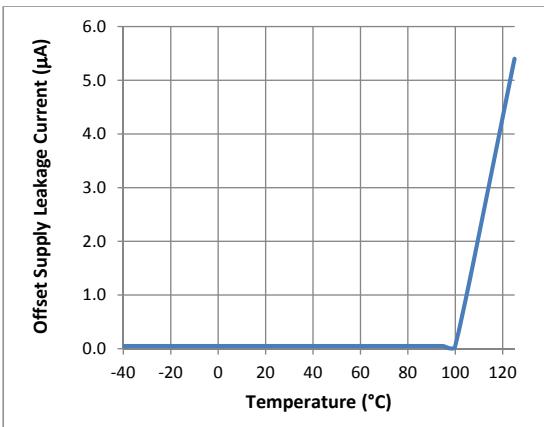


Figure 27. Offset Supply Leakage Current vs. Temperature

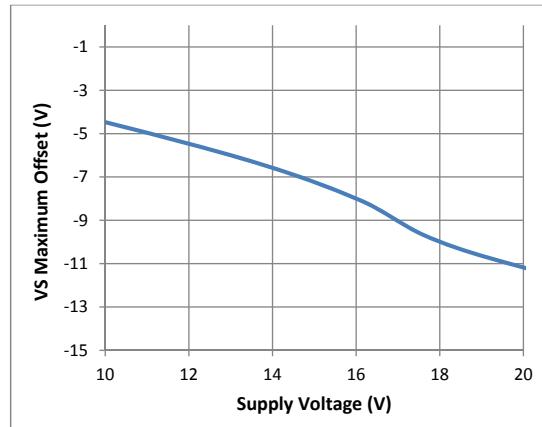


Figure 28. V_S Maximum Offset vs. Supply Voltage

Typical Characteristics, cont'd


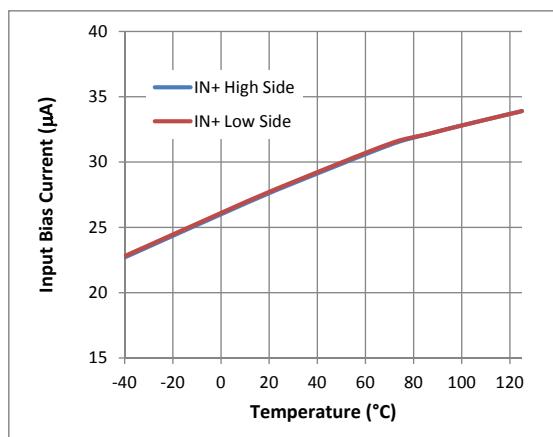


Figure 29. Input Bias Current vs. Temperature

High-Side and Low-Side Gate Drivers

Package Dimensions (PDIP-14)


Please contact support@tfsemi.com for package availability.

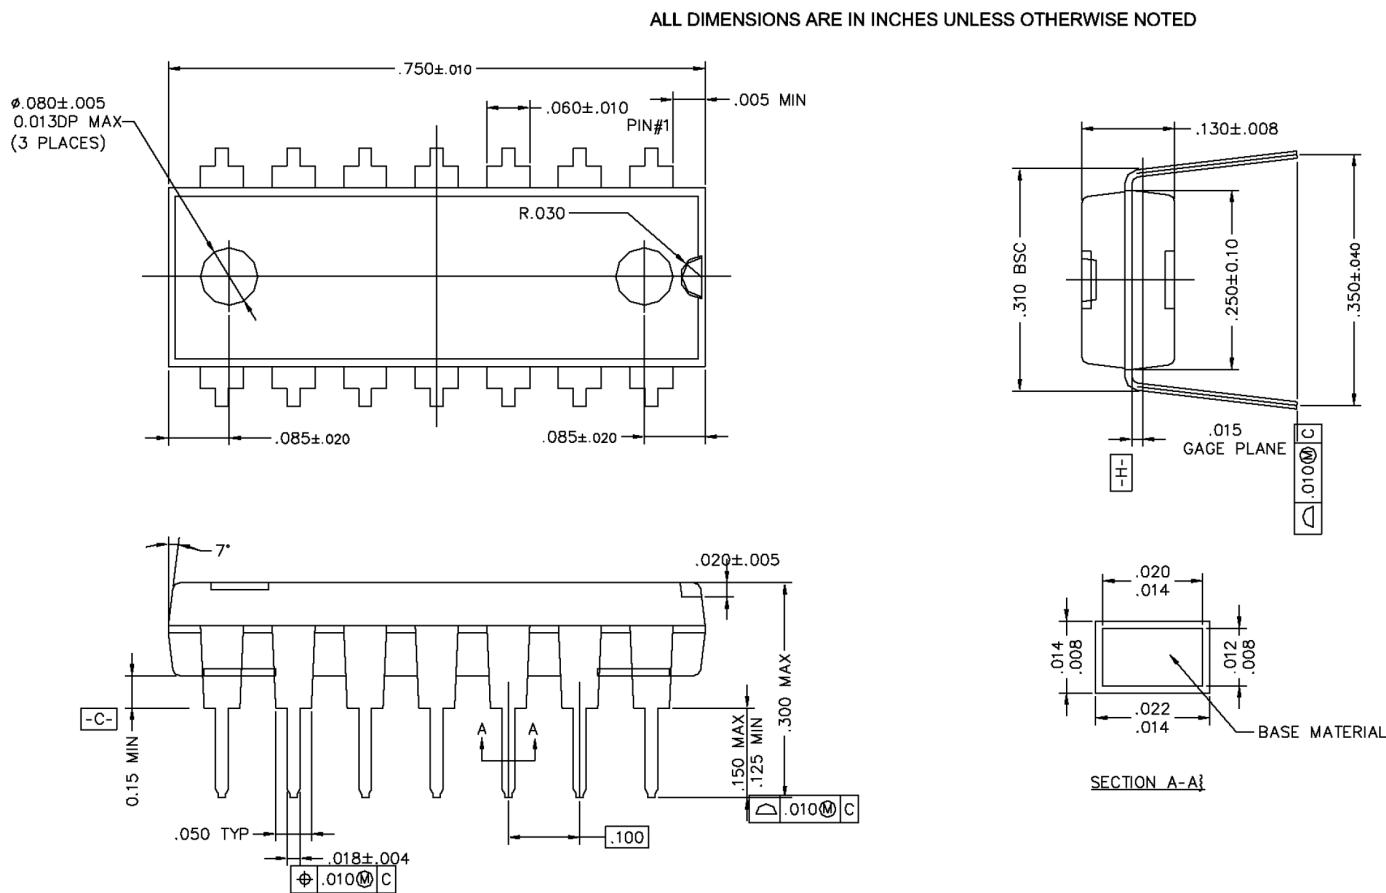

Note: Drawing conforms to jedec ref. MS-001 rev D

Package Dimensions (SOIC-16W)

Please contact support@tfsemi.com for package availability.

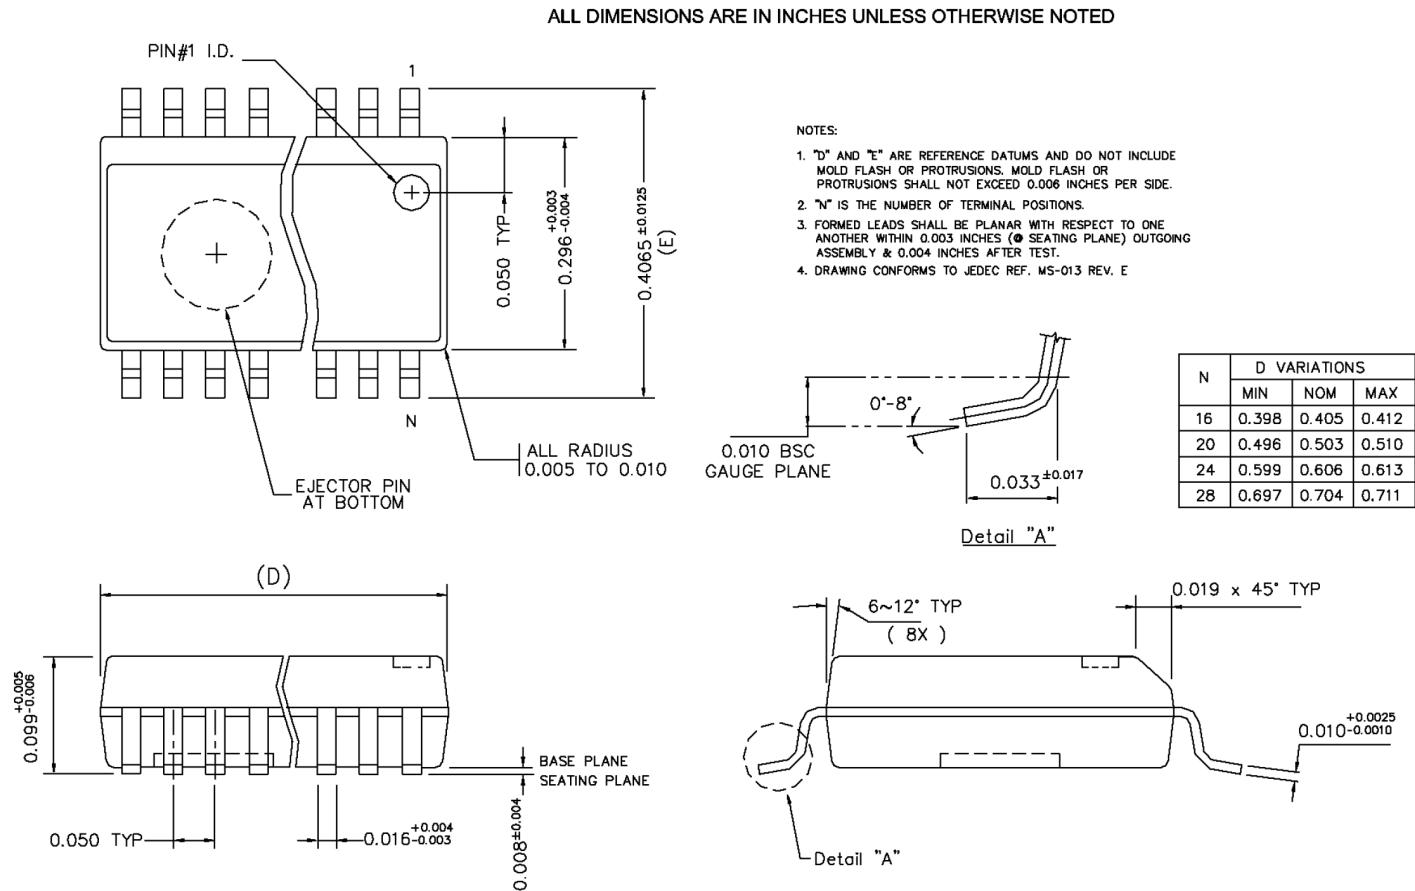

Notes

Important Notice

TF Semiconductor Solutions (TFSS) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC TFSS PRODUCTS ARE SPECIFICALLY DESIGNATED BY TFSS FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF TFSS PRODUCTS WHICH TFSS HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER'S RISK.

TFSS assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using TFSS products.

Resale of TFSS products or services with statements different from or beyond the parameters stated by TFSS for that product or service voids all express and any implied warranties for the associated TFSS product or service. TFSS is not responsible or liable for any such statements.

©2014 TFSS. All Rights Reserved. Information and data in this document are owned by TFSS wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from TFSS.

For additional information please contact support@tfsemi.com or visit www.tfsemi.com